

TubeJet® Collector CBR Series

- Not enough room when performing maintenance? Sly CBR Series TubeJet collectors don't require much headroom, because maintenance is performed from the *side*!
- Need to comply with air quality codes? We will provide a *cost effective* and efficient solution to your pollution control problems.
- Concerned about high pressure or vacuum conditions? The Sly "C" Series of collectors is designed for optimum operation in today's most demanding process systems.
- Need a collector designed for "*cleanability*"? The cylindrical TubeJet is the answer.
- Tired of short bag life eating into your maintenance budget? You'll like the "*on demand*" optional cleaning feature.
- Got a tough application? At Sly, special designs are the rule, rather than the exception. We have built our reputation on supplying equipment to fit our customers' requirements.



• **Quality, reliability and value...Total manufacturing and quality control because Sly makes it with pride in our own shop.**

You get this...	...Because we do this!
<ul style="list-style-type: none"> • Quick, low cost installation 	<ul style="list-style-type: none"> √ Factory installed: timer, conduit & solenoids (pre-wired), air header, pulse valves & tubing √ Factory applied: primer inside & out, finish enamel out
<ul style="list-style-type: none"> • Superior cleanability 	<ul style="list-style-type: none"> √ "No corner" design √ Ground flush interior welds (optional)
<ul style="list-style-type: none"> • Corrosion protection 	<ul style="list-style-type: none"> √ Round walls eliminate "cold spots" and condensation in high heat applications
<ul style="list-style-type: none"> • Longer bag life 	<ul style="list-style-type: none"> √ Radial low velocity dual stage baffled inlet with diffuser decreases turbulence √ Tangential inlet (optional) √ High side inlet (optional) √ 12 vertical wire cage provides extra support, minimizing bag wear
<ul style="list-style-type: none"> • Optimum cleaning 	<ul style="list-style-type: none"> √ Bag design provides optimum filter area with minimum bag quantities
<ul style="list-style-type: none"> • Product always flows 	<ul style="list-style-type: none"> √ Configurable hopper slope/discharge
<ul style="list-style-type: none"> • Reduced compressed air consumption 	<ul style="list-style-type: none"> √ "On demand" cleaning (optional)
<ul style="list-style-type: none"> • Steady air flow/low pressure drop 	<ul style="list-style-type: none"> √ Multi-pulse adjustable solid state timer fine tunes cleaning system



TubeJet® Collector CBR Series

Specifications:

Timer:

- Solid state, multi-pulse, adjustable, standard
- "Clean on demand," optional
- PLC controller, optional

Timer & solenoid enclosure:

- NEMA 4, standard
- NEMA 7/9, optional
- Heated, optional

Differential pressure gauge:

- Magnehelic, range 0-15" WG, standard
- Other types/ranges, optional

Pressure switch, photohelic:

- For "On-demand" cleaning, optional

Materials:

Housing:

- Carbon steel, standard
- Stainless steel, optional
- Special alloy, optional

Hopper:

- Carbon steel, standard
- 60° conical, standard
- Special hoppers, optional

Construction:

- Certified AWS welded housing, standard
- ASME design criteria, standard
- (4) support lugs, standard
- Explosion vents, optional
- High temperature construction, optional
- Factory insulation, optional

Surface protection:

- Primer in and out, finish enamel out, standard
- Special paint and coatings, optional
- Galvanized, optional

Operating pressure:

- +/-20" WG, standard
- +/-100" WG, optional
- +/-17" Hg, optional
- ASME code stamp over 15 PSIG, optional
- Explosion containment, optional

Filter bags:

- 5-3/4" diameter, standard
- Other diameters, optional
- Grounded, optional
- Various fabrics and finishes, optional

Cages:

- 11 ga galv steel; 12 vertical wire with horizontal rings on 8 inch centers; with venturi assembly and quick release bag clamps, standard
- Coated or alloy cages and venturis, optional

Air stream connections:

Inlet:

- Flanged, radial, located in hopper, low velocity, dual staged with baffle and diffuser, standard
- Tangential, optional
- Stone box, optional

Outlet:

- Flanged, standard
- Custom configuration, optional


Access:

Housing:

- 18" x 36" or 18" x 48" weather-proof, hinged access door, standard

Hopper:

- Flanged inspection port, standard
- Custom, optional

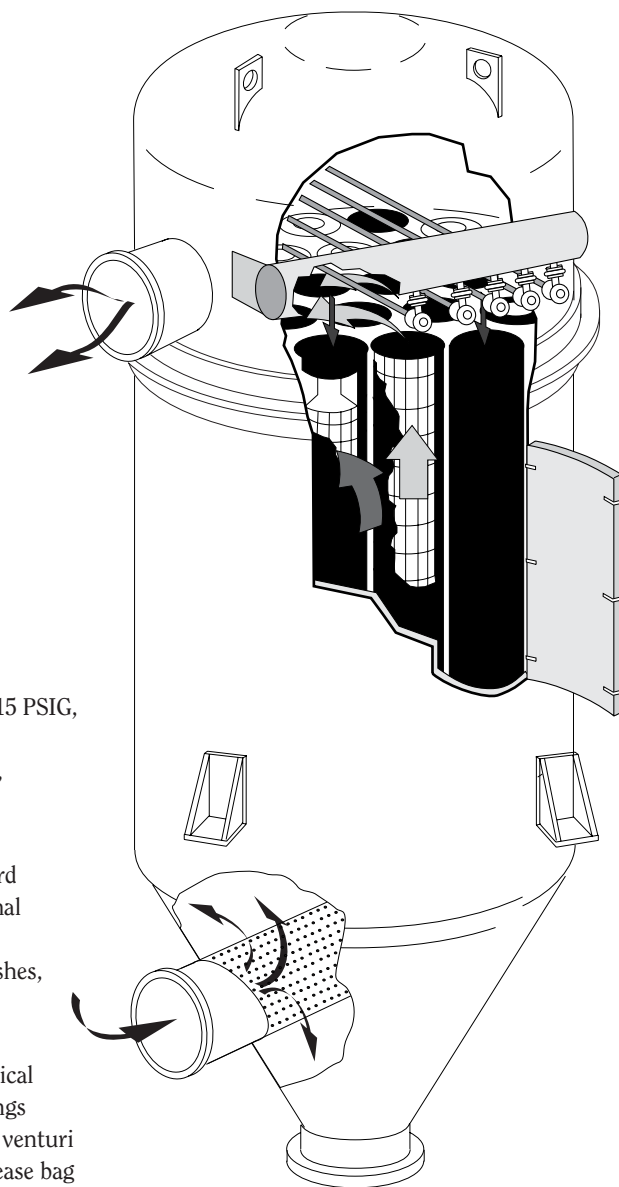

Supports:

- Structural steel legs, optional
- Access platform, optional
- Ladder, optional
- Interior safety grid, optional

Accessories:

- Control panel
- Exhaust fan
- Rotary valve
- Hopper vibrator
- Other



Unit 16
East Goscote Industrial Estate
Leicester
LE7 3XA
United Kingdom

Tel: +44 (0)116 260 8187 - Fax: +44 (0)116 264 0543
Web: www.slyfilters.com - Email: Sales@slyfilters.com